
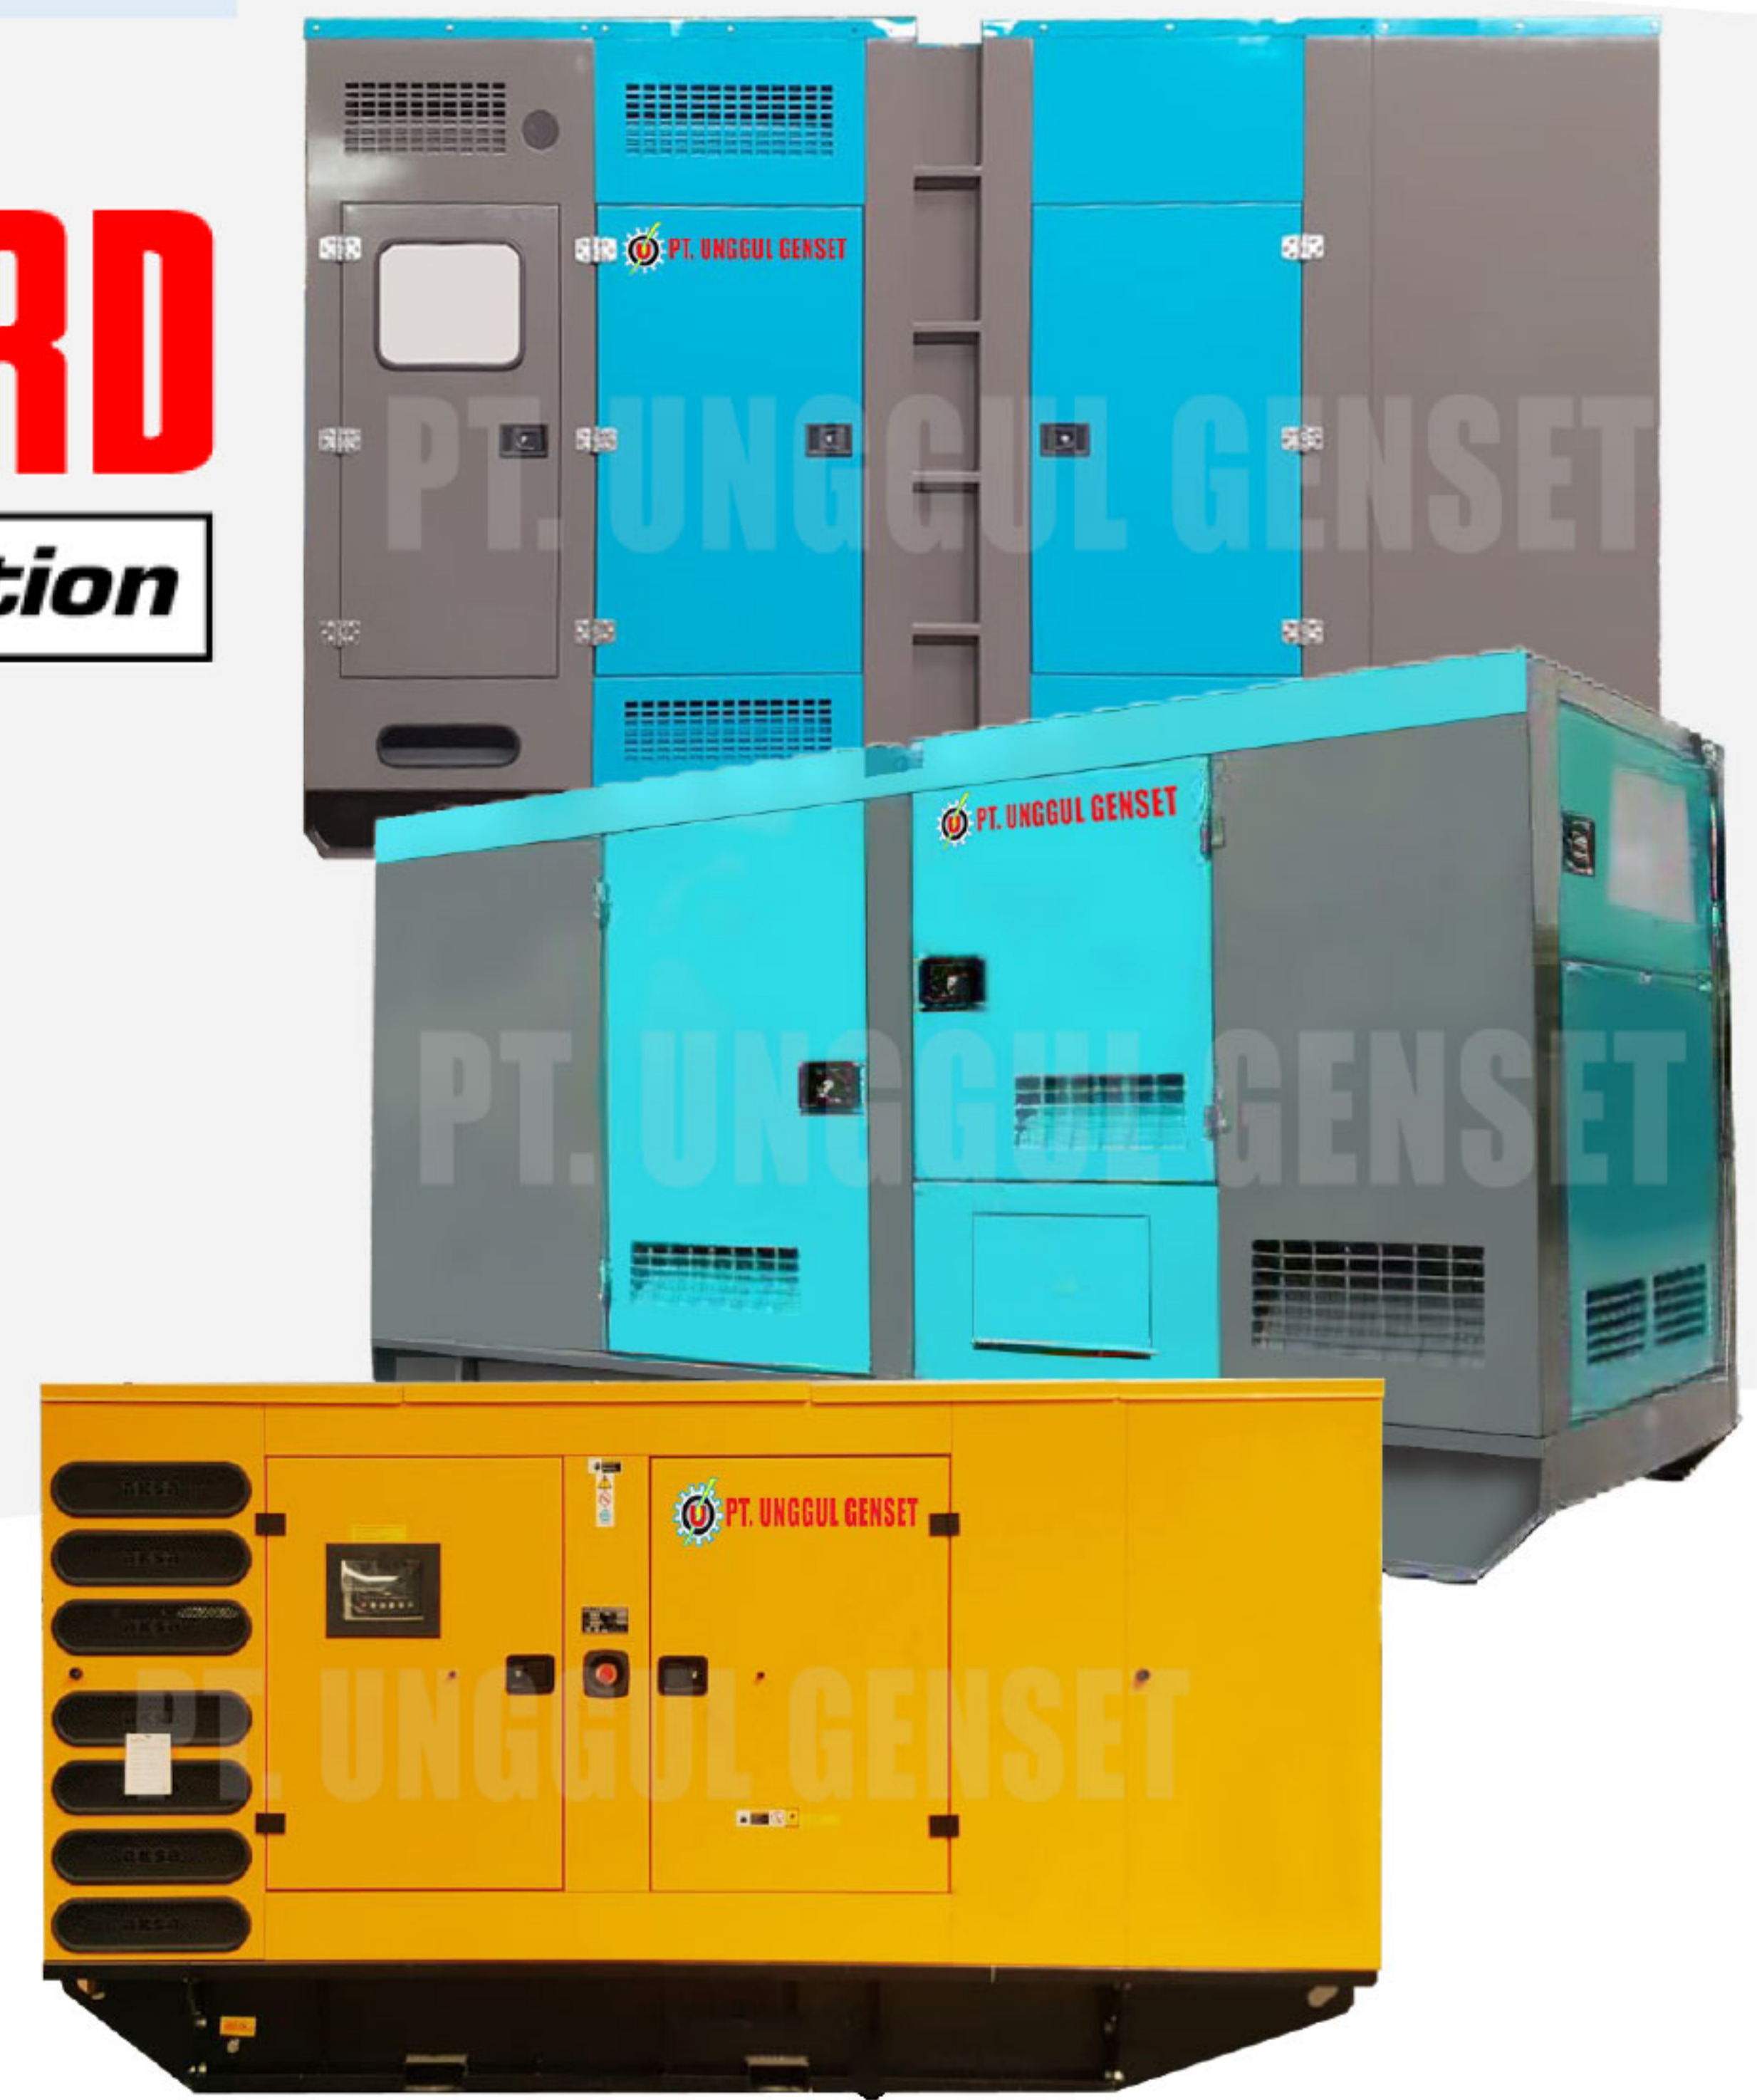


PT. UNGGUL GENSET

PERKINS ENGINE SPECIFICATION

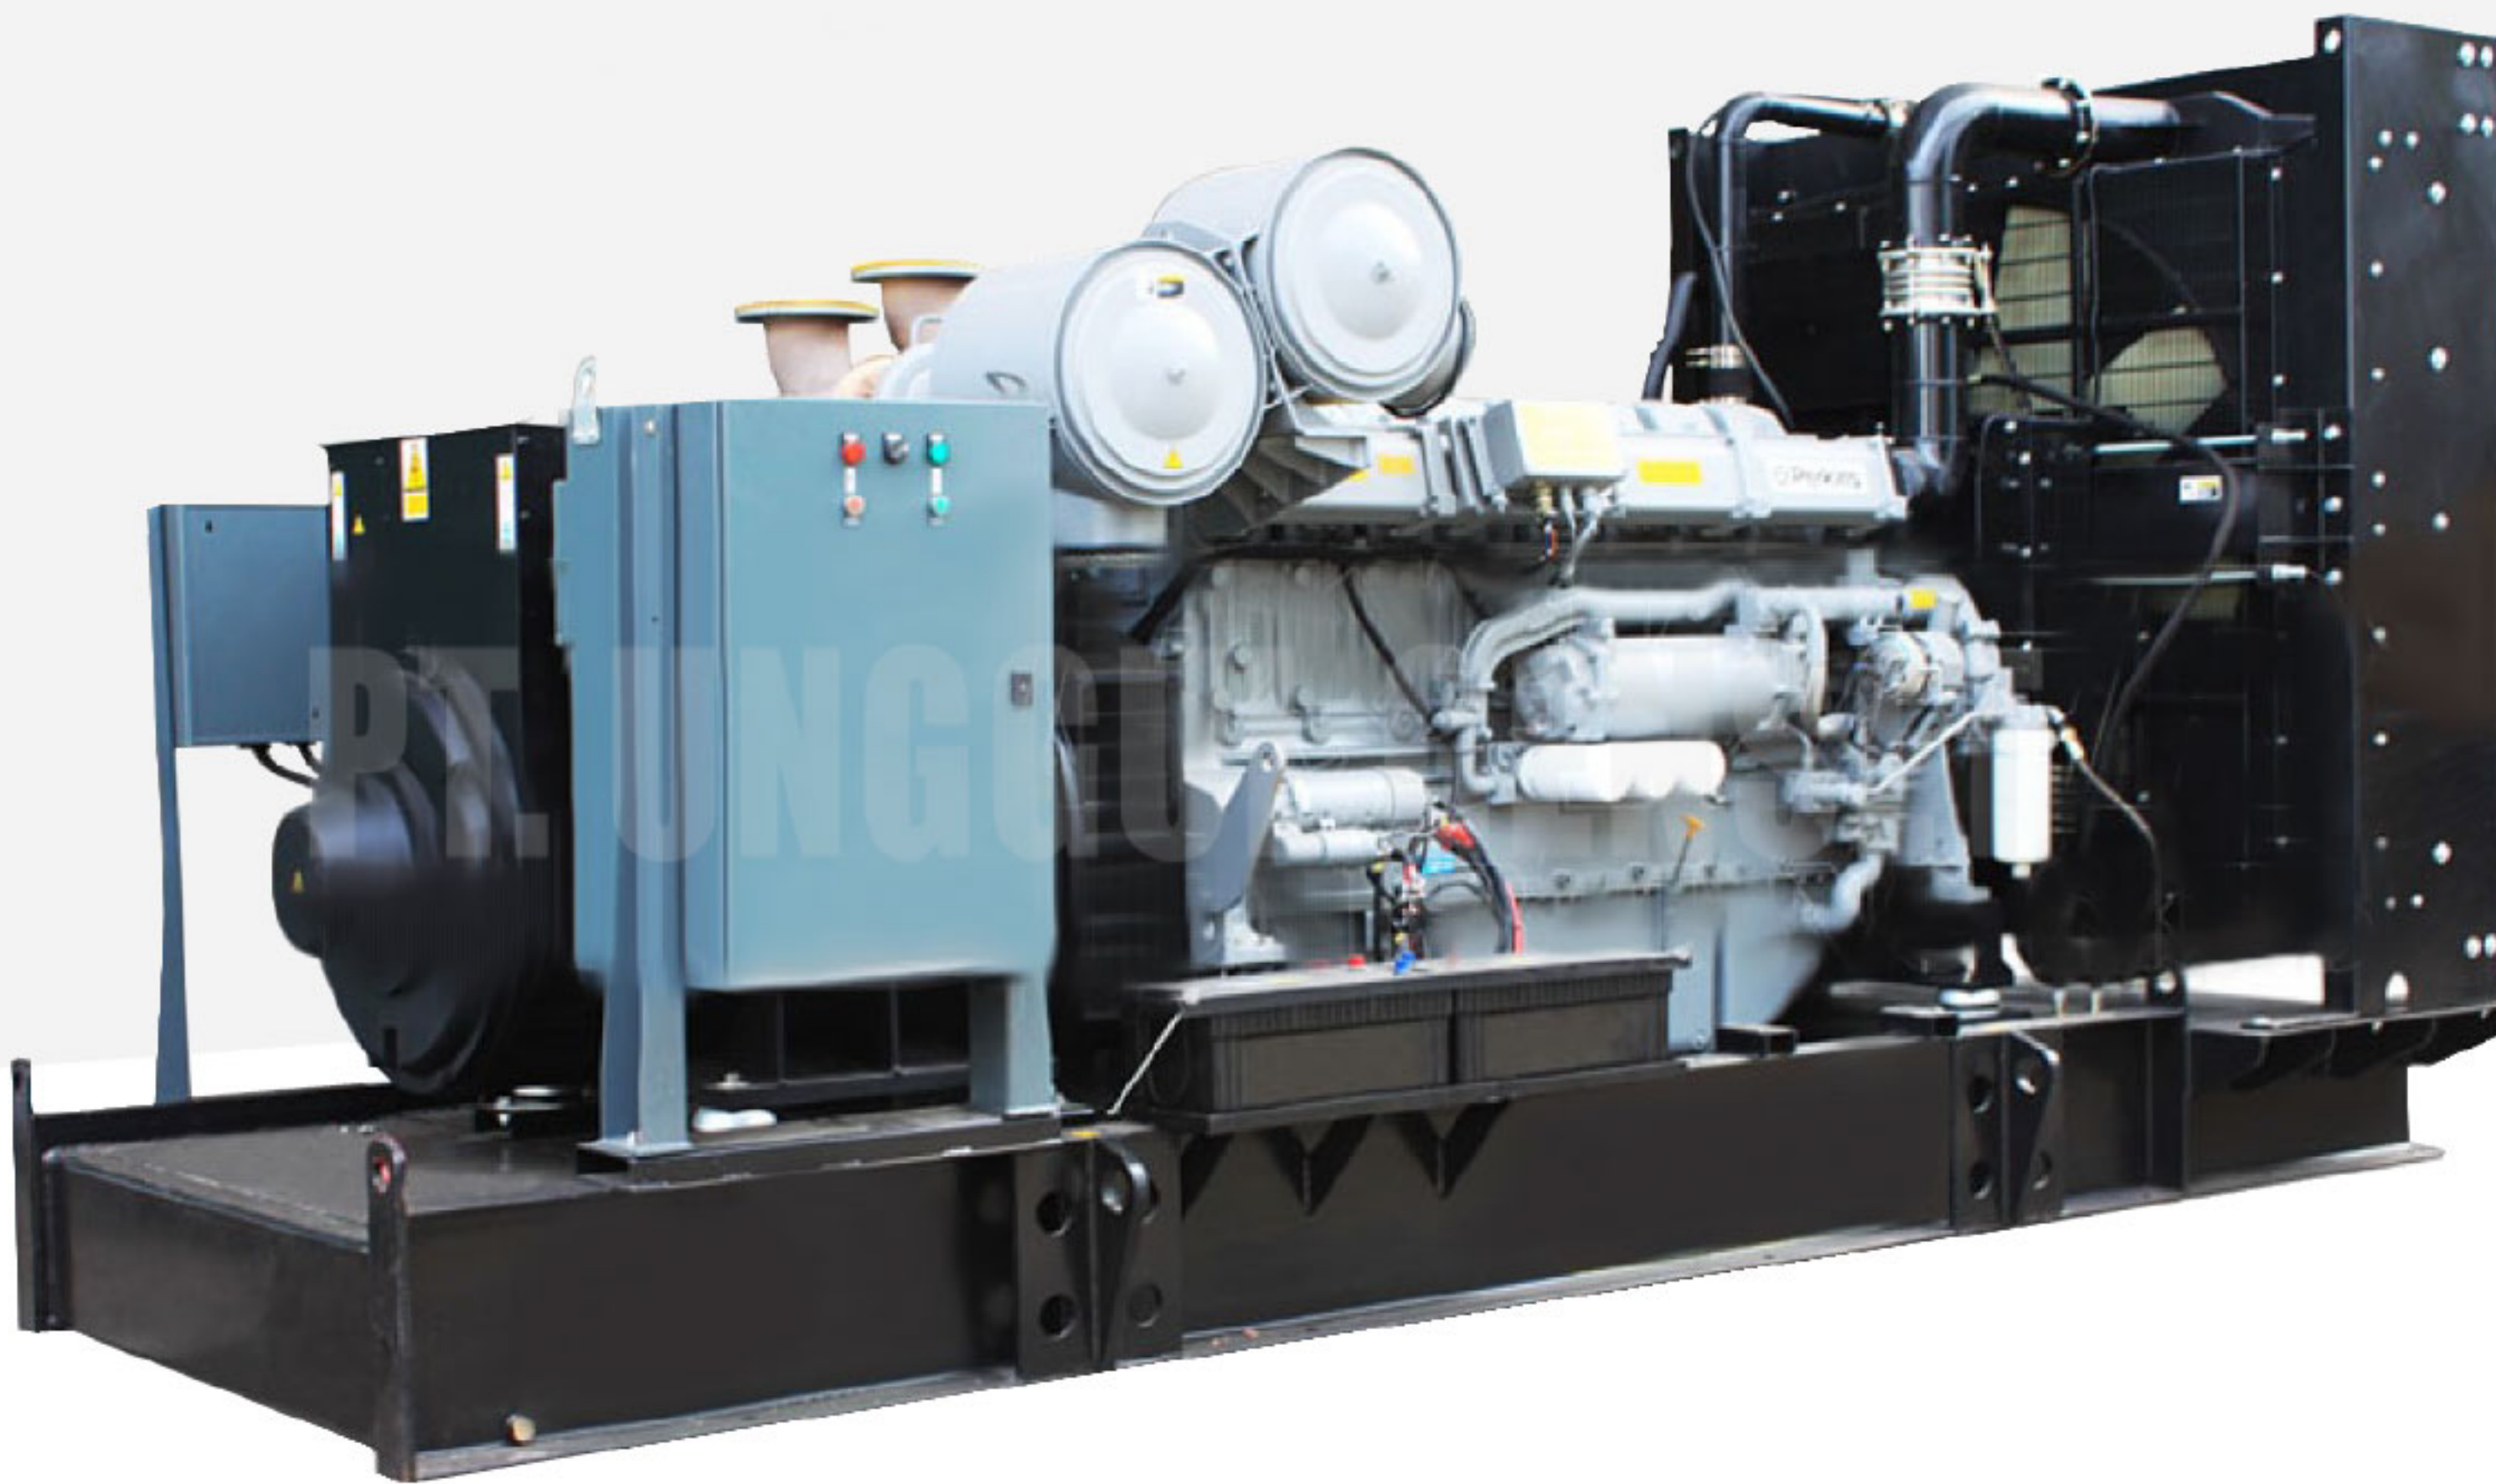

*Bentuk, warna dan spesifikasi dapat berubah sewaktu waktu tanpa pemberitahuan terdahulu

MODEL	Output Power		PERKINS ENGINE	No. Of Cylinder	Bore x Stroke (mm)	Total Displacement (L)	Engine output at max		Fuel Consumption (L/h)		Fuel Tank Capacity	Total Oil Lubricating Capacity (L)	Coolant capacity (engine only) (L)	Approx dimensions and weight			
	PRIME KVA	STANBY KVA					kWm	HP	75% Load	100% Load				Open Type		Silent Type	
														LXWXH (m)	Weight (Kg)	LXWXH (m)	Weight (Kg)
11P	10	11	403A-11G1	3	77 x 81	1,131	9,5	12,7	2,3	3	Minimum 5 hours operation	4,9	5,2	1,32 x 0.68 x 0.98	417	1.97 x 0.89 x 1,19	665
15P	13,5	15	403A-15G1	3	84 x 90	1,496	13,5	18,1	2,8	3,7		6	6	1,38 x 0,75 x 1,12	453	2,03 x 0,92 x 1,23	720
16,5P	15	16,5	403A-15G2	3	84 x 90	1,496	15	20	-	5		6	6	1,48 x 0,75 x 1,13	460	2,03 x 0,92 x 1,23	730
22P	20	22	404A-22G1	4	84 x100	2,216	20,6	27,6	4	5,3		10,6	7	1,5 x 0,82 x 1,2	556	2,04 x 0,93 x 1,27	848
33P	30	33	1103A-33G	3	105 x 127	3,3	31	41,6	5,61	7,2		8,3	10,2	1,58 x 0,83 x 1,26	754	2,2 x 0,93 x 1,41	1049
50P	45	50	1103A-33TG1	3	105 x 127	3,3	46,5	62,4	8,23	10,8		7,9	10,2	1,72 x 0,85 x 1,26	868	2,39 x 1,07 x 1,42	1090
66P	60	66	1103A-33TG2	3	105 x 127	3,3	60,5	81	-	14,6		8,3	10,2	1,72 x 0,85 x 1,26	913	2,39 x 1,07 x 1,42	1225
72P	65	72	1104A-44TG1	4	105 x 127	4,4	65,6	88	11,2	14,8		8	13	1,91 x 0,9 x 1,31	985	2,49 x 1,07 x 1,42	1421
88P	80	88	1104A-44TG2	4	105 x 127	4,4	80,7	108,2	14	18,7		8	13	2,18 x 0,95 x 1,37	1066	2,75 x 1,07 x 1,67	1497
110P	100	110	1104C-44TAG2	4	105 x 127	4,41	103	138	17,1	22,6		8	12,6	2,2 x 0,95 x 1,37	1147	2,9 x 1,12 x 1,70	1642
150P	135	150	1106A-70TG1	6	105 x 135	7,01	135,8	182	22,7	30,2		18	21	2,35 x 1,1 x 1,52	1567	3,53 x 1,28 x 1,93	2256
165P	150	165	1106A-70TAG2	6	105 x 135	7,01	153,6	206	24,7	33,4		16,5	21	2,54 x 1,1 x 1,55	1650	3,53 x 1,28 x 1,96	2367
200P	180	200	1106A-70TAG3	6	105 x 135	7,01	179,8	241,1	31,8	41,6		16,5	21	2,54 x 1,1 x 1,56	1696	3,53 x 1,28 x 1,96	2415
220P	200	220	1106A-70TAG4	6	105 x 135	7,01	196,3	263	34,7	45,8		16,5	21	2,65 x 1,1 x 1,56	1765	3,58 x 1,28 x 1,96	2626
275P	250	275	1506A-E88TAG3	6	112 x 149	8,8	244	327	42	56		41	-	2,87 x 1,23 x 1,73	2220	4,06 x 1,4 x 2,12	3067
330P	300	330	1506A-E88TAG5	6	112 x 149	8,8	299	401	48	65		41	-	2,87 x 1,23 x 1,75	2330	4,06 x 1,4 x 2,12	3276
385P	350	385	2206C-E13TAG2	6	130 x 157	12,5	368	493	58	75		40	51,4	3,2 x 1,31 x 2	2960	4,59 x 1,54 x 2,36	4463
440P	400	440	2206C-E13TAG3	6	130 x 157	12,5	413	554	65	85		40	51,4	3,2 x 1,31 x 2	3250	4,59 x 1,54 x 2,4	4760
550P	500	550	2506A-E15TAG2 / 2506C-E15TAG2	6	137 x 171	15,2	495	664	76	100		62	58	3,39 x 1,45 x 2,05	3767	4,90 x 1,54 x 2,45	5052
660P	600	660	2806A-E18TAG1A	6	145 x 183	18,1	593	795	90	123		62	61	3,43 x 1,63 x 2,12	4299	4,93 x 1,9 x 2,46	6092
720P	650	720	2806A-E18TAG2	6	145 x 183	18,1	628	842	97	132		62	61	3,43 x 1,63 x 2,12	4350	4,93 x 1,9 x 2,46	6143
900P	800	900	4006-23TAG3A	6	160 x 190	22,921	786	1054	130	172		113,4	105	3,98 x 1,72 x 2,22	5874	5,92 x 2,2 x 2,45	7274
1100P	1000	1100	4008TAG2A	8	160 x 190	30,561	985	1321	162	215		153	162	4,57 x 1,95 x 2,24	7038	7,5 x 2,3 x 2,52	10600
1400P	1250	1400	4012-46TWG2A	12	160 x 190	45,842	1224	1641	196	259		177	201	4,92 x 2,08 x 2,46	9772	6,06 x 2,44 x 2,59	15972
1650P	1500	1650	4012-46TAG2A	12	160 x 190	45,842	1459	1957	234	310	-	177	210	4,86 x 2,16 x 2,45	10318	12,19 x 2,44 x 2,9	18318
1900P	1710	1900	4012-46TAG3A	12	160 x 190	45,842	1643	2203	275	370	-	177	210	5,05 x 2,2 x 2,59	10700	12,19 x 2,44 x 2,9	18800
2250P	2050	2250	4016-61TRG2	16	160 x 190	61,123	1985	2659	301	405	-	237,2	252	5,95 x 2,39 x 3,02	13800	12,19 x 2,44 x 3,3	22680
2250P	2050	2250	4016TAG2A	16	160 x 190	61,123	1937	2596	-	-	-	237,2	316	5,95 x 2,2 x 2,6	12738	12,19 x 2,44 x 2,9	21618
2500P	2250	2500	4016-61TRG3	16	160 x 190	61,123	2183	2925	344	470	-	237,2	270	6.08 x 2,32 x 3.03	13850	12,19 x 2,44 x 3,3	22900